



 **schmidt**  
a brand of aebi schmidt

# Tarron HP-2W

Snow plough



The Tarron HP-2W is a multi-blade, heavy-duty snow plough for use on motorways, with a working width of over 6m thanks to two fold-out wings and an angle of attack of 30°. It is suitable for mounting on trucks from 18 tonnes.

## Highlights

- **Multi-blade** system with two retractable wings
- Plough blade segments **automatically adjust to the contours of the road surface**
- Snow clearing in several **different** positions or **working widths**

## Your benefits

- **Efficiency:** The Tarron HP-2W achieves the same clearing width as a front and side plough combined.
- **Excellent clearing result:** The multi-blade system adapts perfectly to the road contours, even at high speeds.
- **Flexibility:** The folding positions allow four possible working widths for large and small tasks.

We know how important it is that your machines and equipment are always ready to deploy. **Get in touch with us** about our range of tailored services and original spare parts.





## Performance features

### Plough blade

The six plough blade segments, including outer wings both right and left, adapt perfectly to the contours of the road thanks to their individual suspension which, even at high speeds, leads to very clean snow clearance. The two outer wings can be adjusted so that different clearing widths can be set.



When fully unfolded, the snow plough has an outstanding working width of 6.2 m. When the left wing is folded in, the working width reduces to 5.1 m, and when the right wing is folded in, it reduces to 4.5 m. When both wings are fully folded, the clearing width is 3.4 m, while the wings can be folded hydraulically in both transport and clearing positions, minimising the transport width. They are automatically raised during the clearing operation.

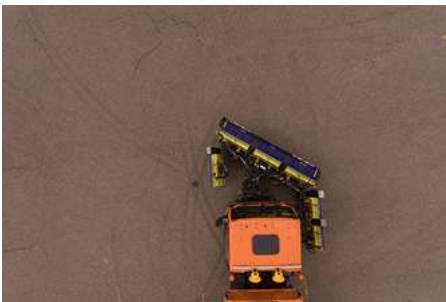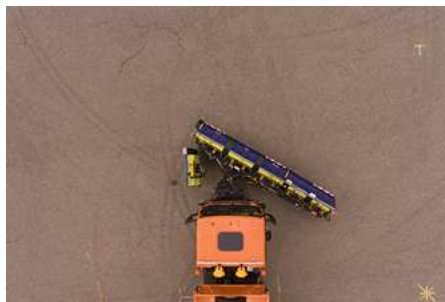

### Override security system

The six segments of the plough adapt perfectly to the contours of the road, allowing it to automatically pass over small obstacles. Even if the plough hits an obstacle, only the one ploughshare that has direct contact with it will rise, the rest of them will stay continue snow clearing.

Individual suspension on four arms ensures that the share can spring back and prevent damage to the plough, while hydraulic valves open automatically in the event of a collision, allowing the wings to fold in easily.

### Cutting edges

#### Steel cutting edge (S)

A multi-purpose, cost optimised solution for aggressive clearing of hard and/or compact snow. Steel cutting edges are resistant to bending and twisting, giving a clean result.

#### Combi cutting edge (size 36 and 50) (C36 / C50)



A more durable cutting edge made of steel, rubber and ceramic. This cutting edge is meant for aggressive snow clearing and can be a good alternative if the steel cutting edge is wearing out too fast. The combination of materials ensures noise and vibration reduction.

#### TUCA SX cutting edge

A state-of-the-art, high performance cutting edge designed for long- term use. The patented Küper Wave Technology uses a curved profile to remove snow without resistance. Separate tungsten holders embedded in rubber and vulcanized between front and rear Hardox 400 steel plate make the TUCA SX incredibly durable.

### GK 5 cutting edge

A GK cutting edge allows for more efficient snow slush clearing with longer service life and less friction. This cutting edge is made of steel, rubber and corundum and is therefore more aggressive than a rubber cutting edge.

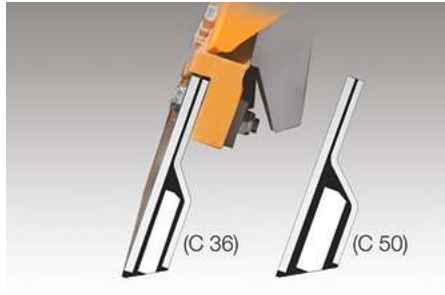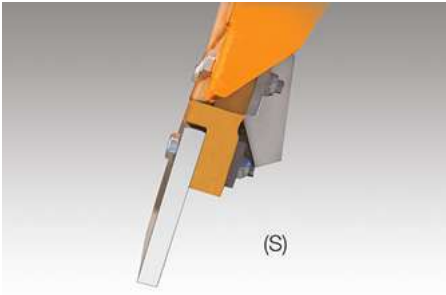

### Lifting device

A three-link lifting device ensures optimum power transmission to the carrier vehicle and tension-free lifting and lowering of the snow plough. Enables to gain big lifting height and it is easy to operate.



### Angling system

Two swivel cylinders are used for making lateral adjustments, which place the plough in the desired clearing position. Adaptation system of the turning angle prevents the plough from being angled to the left side when there is a risk of the collision with the vehicle. Easier maintenance of the plough thanks to providing the same hydraulic cylinders for the lifting and angling device as well as for the operating the wings.



### Collision protection

The wings fold in and out hydraulically, while three sensors ensure they do not damage the vehicle when folding in. The current working width is always marked by LED position lights.

### Working support devices

#### Castor wheels

The infinitely height-adjustable castor wheels with optional splash guards ensure precise adjustment of the snow plough and provide appropriate aggressiveness during snow clearing. They support the frame when driving over obstacles and extend the service life of the cutting edge.



#### Sliding shoes

Alternatively, maintenance-free height-adjustable sliding shoes can be fitted. They are made of highly wear-resistant steel or combi.

## Kerb deflectors

The plough wings are each fitted with a kerb deflector, which prevents the plough body from scraping against kerbs and edges.

## Snow deflector

The Tarron HP-2W is equipped with a polyurethane snow deflector, which can be optionally raised to reduce the clearance width.



## Mounting

The centre of gravity of the Tarron HP-2W is only 40cm in front of the vehicle's mounting plate, so that it can be mounted on both three- and four-axle vehicles, providing the vehicle has a front axle of at least nine tonnes.



## Options

- Warning marks, warning flags or LumiFog
- Side lamps LED / Additional work light on the left or right side
- LED flashing lights (orange)



## Gallery



## Related products

### Tarron HP

Snow plough



### Stratos 4.0 - 12.0 m<sup>3</sup>

Spreader





Trust in our many years of uniquely diverse experience. **Get in touch with us.** We'll find the right solution for your specific challenge.

## Technical data

### Construction

Number of blades	6
------------------	---

### Dimensions

Plough height centre	1,096 mm
Plough height right	1,096 mm
Plough height left	1,096 mm
Length at cutting edge	7,205 mm
Clearing width	6,240 mm when plough is swivelled (30°) and both wings are folded out 3,380 mm when plough is swivelled (30°) and both wings are folded in 5,110 mm when plough is swivelled (30°) and left wing is folded in 4,510 mm when plough is swivelled (30°) and right wing is folded in
Total width	7,389 mm
Transport width	6,530 mm when plough is swivelled (30°) to the right and both wings are folded out 4,060 mm when plough is swivelled (30°) to the right and both wings are folded in 6,740 mm when plough is swivelled (30°) to the left and both wings are folded out 4,300 mm when plough is swivelled (30°) to the left and both wings are folded in

### Weights

Approx. weight with steel cutting edges	1,765 kg
---	----------



© Aebi Schmidt Group  
www.aebi-schmidt.com

Aebi Schmidt Holding AG  
CH-8050 Zurich, Switzerland

All rights reserved. Technical data is subject to change.  
Illustrations are not binding. Errors and amendments excepted.

Document created on 9 JUN 2024

